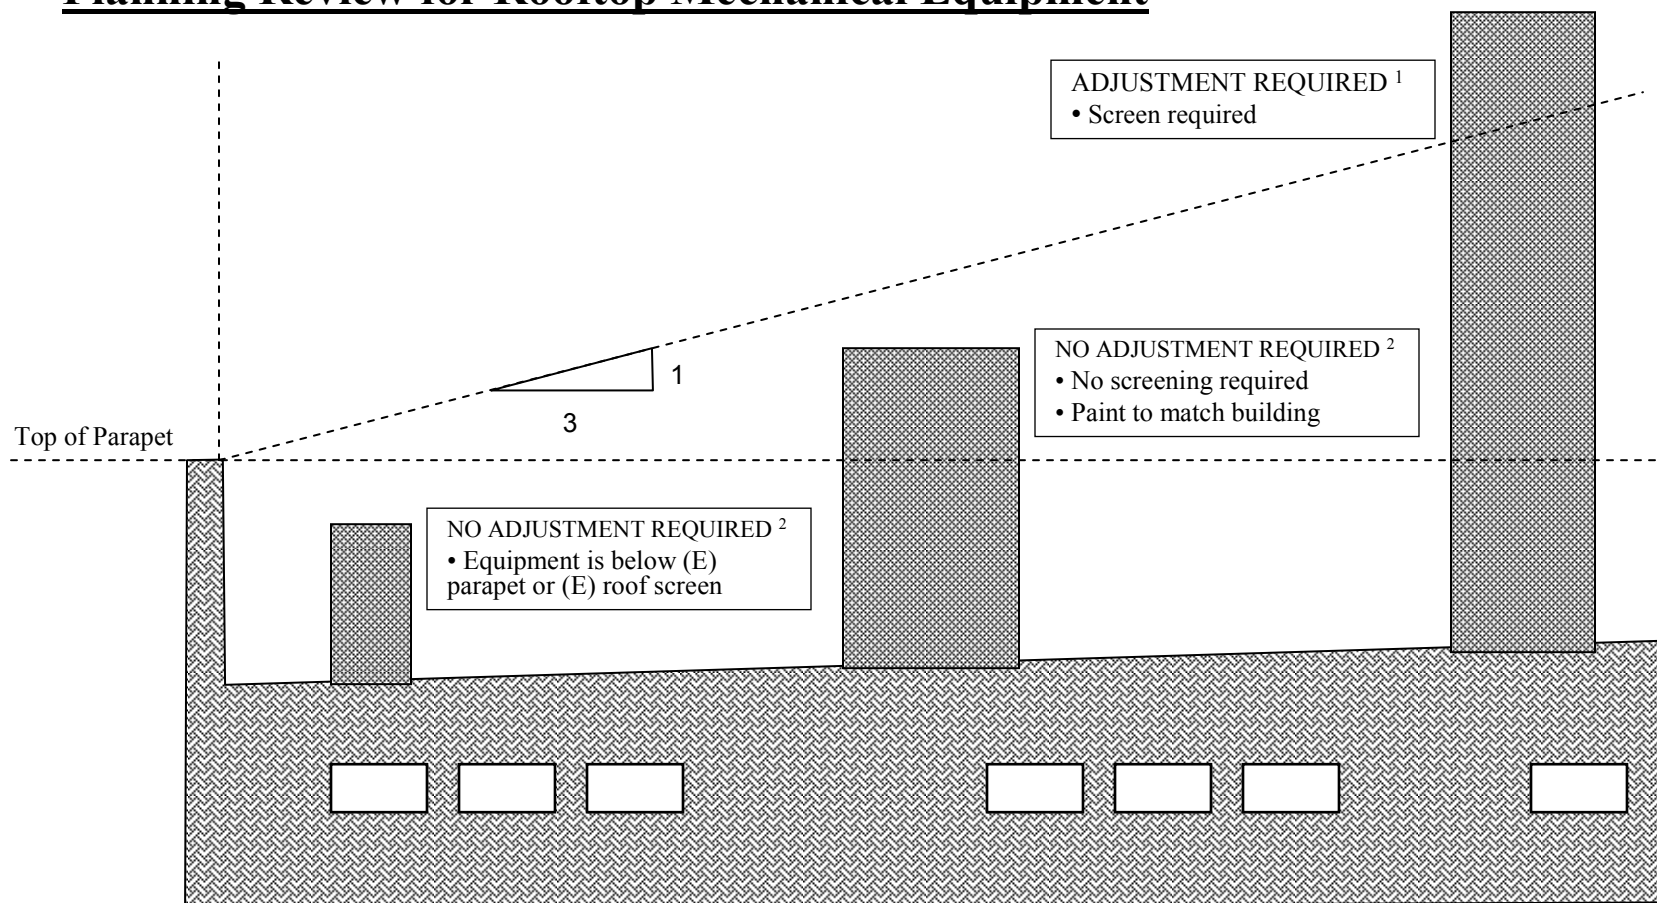


*ILLUSTRATIVE PLANNING DIAGRAM – FOR REFERENCE ONLY***Planning Review for Rooftop Mechanical Equipment**

1. Rooftop Mechanical Equipment projecting above a 3:1 slope taken from top of parapet does require a Permit Adjustment and is required to be screened
2. Mechanical Equipment projecting above existing top of parapet, but below a 3:1 slope taken from top of parapet does not require a Permit Adjustment but is required to be painted to match the building parapet